


# MAR510 series Stainless steel #316 type

AIR UNITS (R. UNIT)



Symbol:



## Specification:

| Model                     | MAR510                                      |      |
|---------------------------|---------------------------------------------|------|
| Bore No.                  | 20A                                         | 25A  |
| Port size                 | PT 3/4                                      | PT 1 |
| Medium                    | Air                                         |      |
| Operating pressure range  | 0~9.9 kgf/cm <sup>2</sup> (0~0.99 MPa)      |      |
| Proof pressure            | 15 kgf/cm <sup>2</sup> (1.5 MPa)            |      |
| Regulation pressure range | 0.5~8.5 kgf/cm <sup>2</sup> (0.05~0.85 MPa) |      |
| Ambient temperature       | -5~+60°C (No freezing)                      |      |
| Attachment                | Pressure gauge                              |      |
| Weight                    | 3050 g                                      |      |




## Order example:

MAR510 — 20A — BSP

MODEL

BORE SIZE  
20A: PT 3/4  
25A: PT 1

PORT THREAD  
Blank: PT thread  
BSP: BSP thread  
NPT: NPT thread

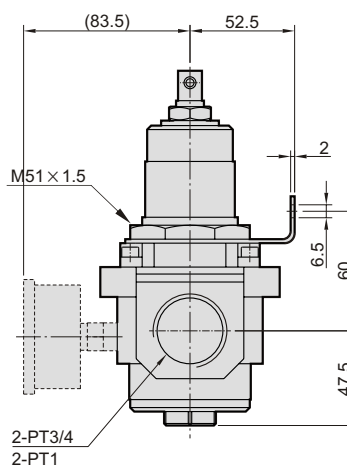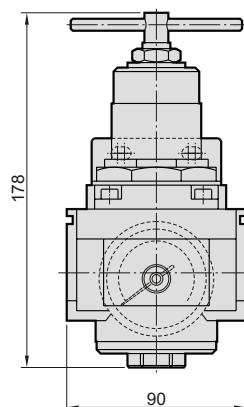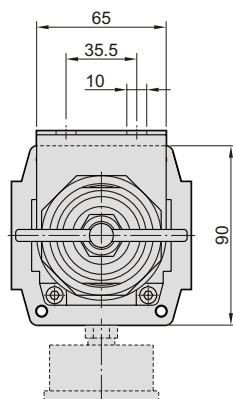

## Flow feature:

