


# MUSD series

## 2/2 WAY N.C. DIAPHRHRM TYPE SOLENOID VALVE



### Specification

- IP65 waterproof coil.
- Continuous cycle, 100% ED.
- Ex coil is EExm II T4 PTB approval.

### Power consumption

Coil power	2	3	2E
AC 50/60Hz(VA)	6.9	8.0	5.3
DC(W)	6.0	6.8	5.2

### Dimensions

Model	MUSD	
Code Dimension (mm)	15	
L	55	
H	72	
W	38	
C	60	
D	24	
N.W.(Kg)	Coil 2	0.26
	Coil 3	0.31
	Coil 2E	0.54

### Order example

**MUSD-15-J-5-G-AC110**

MODEL




CODE  
15: 1/2"

SEAL MAT'L  
N: NBR  
J: EPDM  
V: VITON

COIL  
2,3,2E  
(\*)

PLUG  
□: DIN  
O: None  
D: LED  
G: 1/2" NPT  
Y: 2 wires

VOLTAGE  
AC220V(50/60)Hz  
AC110V(50/60)Hz  
DC24V

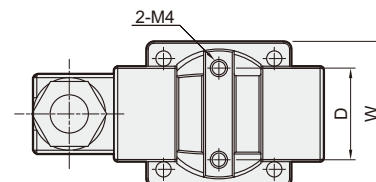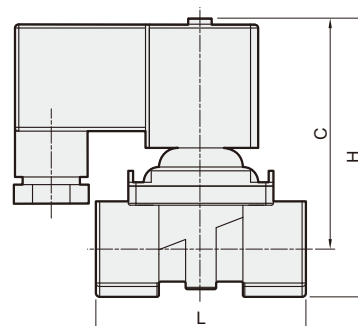

※ Explosion-Proof (2E) coil with LED (D) plug is not applicable.

### Specification

Model MUSD: SCS14 body, for water, air, gas, light oil.																
Code (PIPE) G	Seal mat'l	Coil	Orifice mm	Temp. °C						Working press. (0.3~ bar)						Cv
				Coil 2 - 2E			Coil 3			Coil 2		Coil 3		Coil 2E		
				N	J	V	N	J	V	AC	DC	AC	DC	AC	DC	
15 (1/2)	N	2	15	-5	-10	-5	-15	5	1	10	3	5	1	2.0		
	J	3		60	80	60	120									
	V	2E														