


MY* series

2/2 WAY N.C. Y TYPE PISTON SERIES SOLENOID VALVE



Specification :

- Y type forged brass body
- IP65 100% ED coil
- PTB approval EExmIIT4 coil

Power consumption:

Coil power	4	5	3E
AC(VA)	17.6/15.4	33/23	9.2
DC(W)	15	18.5	10

Dimensions:

Model	MYA/MYS	
Code	10	15
Dimension (mm)		
H	118.0	
L	95.0	
N	59.0	
W	13.0	
N.W.(Kg)	0.55	

Order example:

MYA-10-N-C-4-□-AC

MODEL
MYA
MYS

CODE
10: 3/8
15: 1/2


SEAL MAT'L
N: NBR
J: EPDM
V: Viton
T: Teflon

BODY MAT'L
C: Brass

COIL
4, 5, 3E

PLUG
□: DIN
D: LED
G: 1/2"NPTF

VOLTAGE

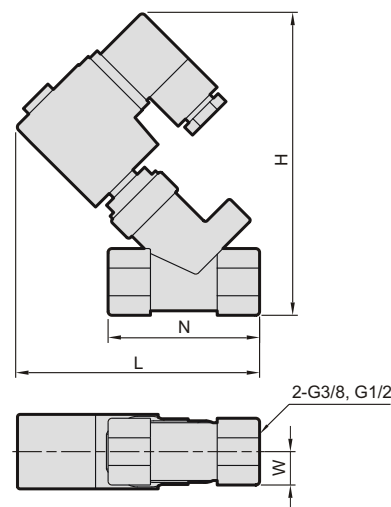

Specification:

Model MYA : for water, air and higher temp. fluids																
PIPE G	Code no.	Seal mat'l	Coil	Orifice mm	Temp. 5~℃						Working press. bar					CV
					Coil 4			Coil 5/3E			Coil 4		Coil 5		Coil 3E	
					N	J	V	N	J	V	AC	DC	AC	DC	AC/DC	
3/8	10	N, J, V	4, 5, 3E	12	95	120	95	145	0.3~16	0.3~10	0.3~20	0.3~12	0.3~5	1.9		
1/2	15													2.6		

Model MYS : for steam and high temp. fluids													
PIPE G	Code no.	Seal mat'l	Coil	Orifice mm	Temp. 5~℃		Working press. bar						CV
					Coil 4/3E	Coil 5	Coil 4		Coil 5		Coil 3E		
							AC	DC	AC	DC	AC/DC		
3/8	10	T*	4, 5, 3E	12	158	185	0.3~5	0.3~2	0.3~10	0.3~7	0.3~5	1.9	
1/2	15											2.6	

* Teflon seal will have 400cc/min. down gas leakage.