

MAF302D / M series


AIR UNIT (MIST / MICROMIST FILTER)




mindman



Symbol



D : 0.3 μ m



M : 0.01 μ m

● MA302D is designed for removal of foreign matter as well as oil mist (Element : 0.3 μ m)

● MA302M is designed for removal of foreign matter as well as oil mist (Element : 0.01 μ m)

Specification

Model	MAF302D/M		
Bore No.	8A	10A	15A
Port size	1/4	3/8	1/2
Medium	Air		
Operating pressure range (※)	0.05~1 MPa		
Proof pressure	1.5 MPa		
Ambient temperature	-5°C~+60°C (No freezing)		
Filter element	0.3 μ m, 0.01 μ m		
Weight	365 g		

※1. Standard unit contains semi-auto-drain function when operating pressure below 0.05 MPa.

※2. Choose auto-drain FMRF300, the pressure range is 0.15 ~ 1 MPa.

Order example

MAF302D - 8A - □ - □

MODEL

FILTER
ELEMENT
D: 0.3 μ m
M: 0.01 μ m


BORE SIZE
8A: 1/4
10A: 3/8
15A: 1/2

D: Auto drain valve
(FMRF300)
N: Nylon bowl




PORT THREAD
Blank: Rc thread
G: G thread
NPT: NPT thread

Option accessories

C type bracket



MAF302-D

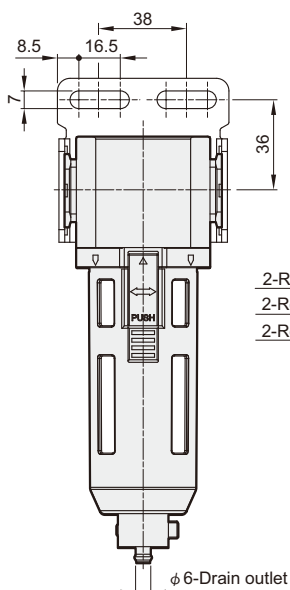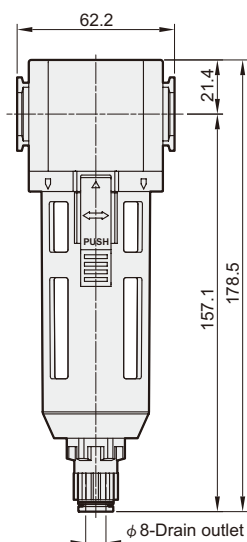

2-Rc1/4
2-Rc3/8
2-Rc1/2